iTcPower

Portable Diesel Generators

Large Tank , Electric Start

DG20000LE / DG20000LE-3
DG20000LE-T

www.itcpowergenerator.com

iTcPower

www.itcpowergenerator.com

GENERATOR		DG20000LE	DG20000LE-3	DG20000LE-T
Frecuency	Hz	50	50	50
Rated Power		13 kW	17.5 kVA	12 kW / 17.5 kVA
Max. Power		14 kW	18.8 kVA	13 kW / 18.8 kVA
Voltage	V	230	230 / 400	230 / 400
Current	A	60.8	27.1	56.5/27.1
Plugs		32A &63A	32A & 16A	63A & 32A
Display		LED6	LED6	LED6
Fuel tank capacity	L	22.5	22.5	22.5
Running time @75% load	H	6	6	6
Sound level @ 7m	dBA	84	84	84
DC output	V/A	12 / 8.3	12 / 8.3	12 / 8.3
Battery	V/Ah	12/45	12/45	12/45
ENGINE		**DV1250E**	**DV1250E**	**DV1250E**
Engine type		Diesel	Diesel	Diesel
Power	hp	24.4	24.4	24.4
Start		Electric	Electric	Electric
Displacement	CC	1247	1247	1247
Oil Capacity	L	3.5	3.5	3.5
ALTERNATOR		**AL15**	**AL15-3**	**AL15-T**
Power	Kw	15	15	15
Power Factor		1	0.8	1 / 0.8
Voltage Regulation		Brush / AVR	Brush / AVR	Brush / AVR
DIMENSIONS & WEIGHT				
Net Weight	Kg	245	245	245
Gross Weight	Kg	280	280	280
Machine size	mm	1100×670×750	1100×670×750	1100×670×750
Dimensions Package	mm	1160×740×885	1160×740×885	1160×740×885

DG — Diesel Generator

LE — Large Tank，Electric Start，1 Phase

LE-3 — Large Tank，Electric Start，3 Phase

LE-T — Large Tank，Electric Start，Full Power 1 Phase & 3 Phase

Specifications are subject to continuous product development

iTcPower
www.itcpowergenerator.com

Options

Canopy

30Ah battery

36Ah battery

4Ah Lithium battery

Control panel

LED5
Voltage AC
Power output
Frequency
Current
Working time

LED6
Voltage AC
Power output
Frequency
Battery voltage
Current
Working time

D30 (ATS)
Smart controller

ATS/AUTO module

Engine

NSK bearing

Euro5 catalyst

Preheater

Alternator

THD⩽5%

Package

Standard packing

iTcPower
www.itcpowergenerator.com

Accessories

ATS box

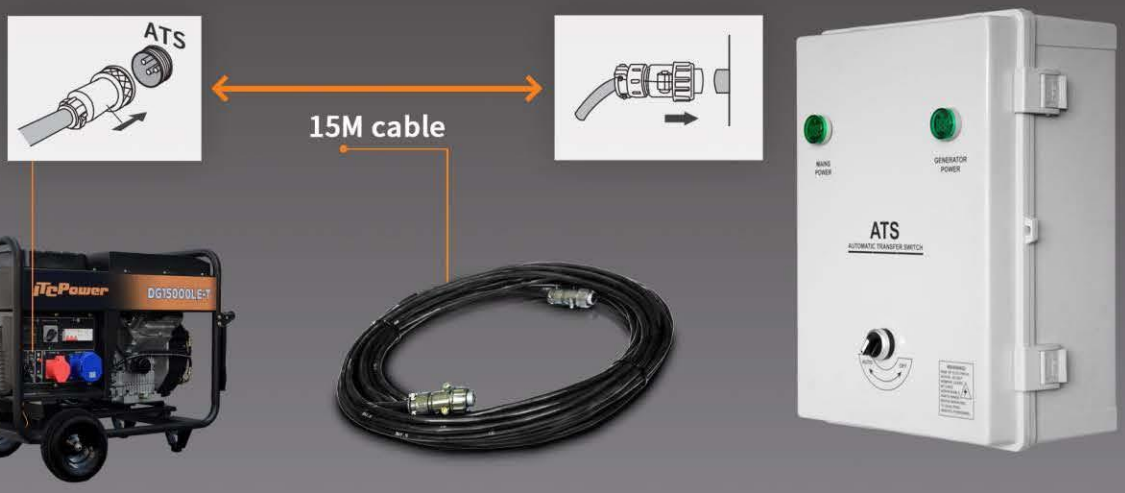

Romote Controller 300M

Push Wheel Kit

T10 10 inch wheels

S10 10 inch wheels